
Mobil and Mobil DTE are registered trademarks of Exxon Mobil Corporation or one of its subsidiaries. The term ExxonMobil is used for convenience only and may refer to ExxonMobil Corporation or one of its affiliates. Nothing in this document overrides the corporate separateness of the affiliates.

Mobil DTE 10 Excel Series energy-efficient hydraulic oils — specially formulated to address the demands of the latest high-pressure hydraulic equipment — are engineered to help you reduce your power consumption and increase your machine output. Expect the following benefits:

- Quantifiable hydraulic efficiency that can lead to reduced power consumption. Plus, excellent high- and low-temperature viscometrics allow for a wider, effective temperature range of operations.
- Long life and durability thanks to excellent shear and thermal stability — for maximum equipment protection and performance at high- and low-temperature extremes.
- Systems stay free of deposits for up to 3x longer than competitive fluids in demanding Mobil Hydraulic Fluid Durability (MFHD) testing, allowing for clean, longer, productive operation of hydraulic systems.
- Environmental considerations with acute and chronic studies indicating no significant aquatic toxicity and eliminating classification for environmental hazard.



DIRECTIONAL CONTROL VALVE

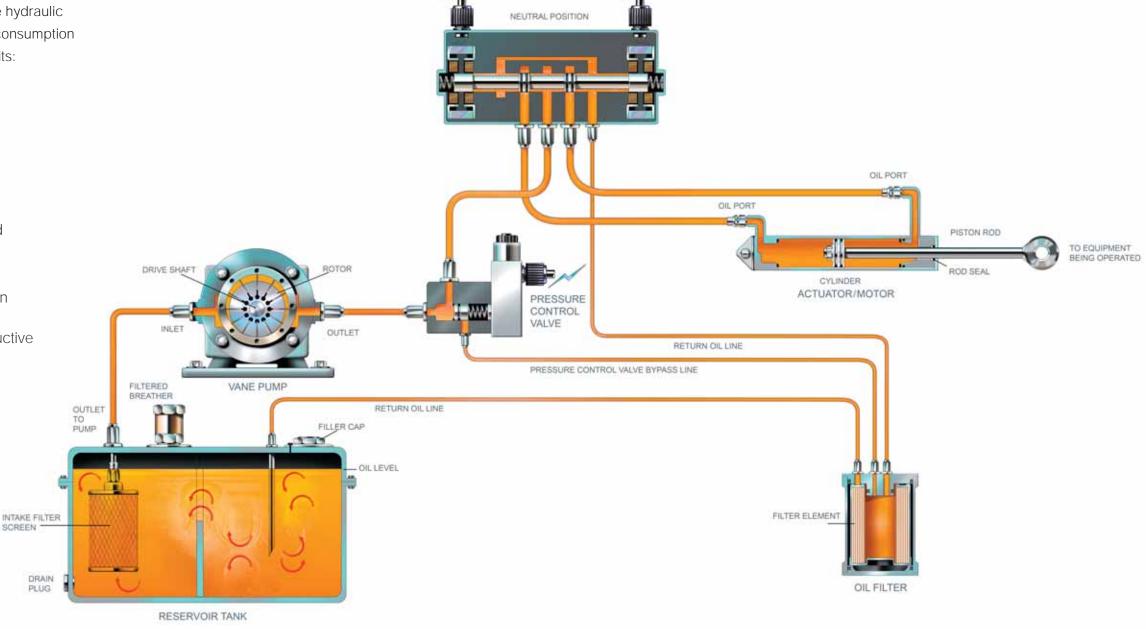

Note: NOT TO SCALE.



DRAIN PLUG